

C/S Armourglaze™ Performance Coating



Top - Hereford Hospital Mortuaries, UK
Bottom - Coppetts Wood Isolation Hospital, UK

TYPICAL USAGE

Designed for use in areas that require high chemical resistance and areas that are subject to aggressive cleaning regimes that require an extremely high performance coating such as:

- category 3 and 4 laboratories
- pharmaceutical clean rooms
- mortuaries
- veterinarian hospitals
- agricultural establishments
- zoos
- areas that are subjected to constant graffiti abuse

PRODUCT DESCRIPTION

C/S **Armourglaze™** has a high cross linked density that produces a tough, impervious, tile-like surface, which prevents chemicals and graffiti from penetrating. This allows the most aggressive chemicals and decontamination processes to be used without affecting the surface properties or the non-sacrificial, anti-graffiti capabilities.

FINISHES

Available in **Eggshell** and **Gloss** finishes.

PIGMENTATION


Coloured or **Clear**

PERFORMANCE

C/S **Armourglaze™** is extremely resistant to a wide range of chemicals and solvents used in the removal of graffiti, fumigation and decontamination processes.

CLEANING

C/S **Armourglaze™** will withstand repeated cleaning with alkaline detergents, antiseptics and fumigation treatments without any degradation to surface or performance

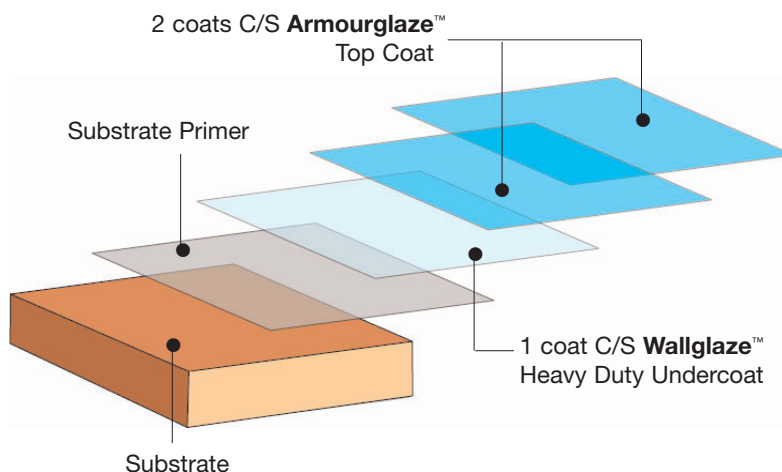

MODEL SPECIFICATION CLAUSES

M60 PAINTING/CLEAR FINISHING

111A PERFORMANCE COATING

- *Manufacturer and reference: C/S Wallglaze Armourglaze performance coating system by Construction Specialties (UK) Ltd, Tel: +44 (0) 1296 611000 Fax: +44 (0) 1296 399444*
- *Surface(s):*
- *Preparation: Dry, clean and free from grease dirt and laitance*
- *Initial Coat(s): One coat of Substrate Primer**
- *Intermediate Coat(s):
- Apply one coat of Wallglaze Heavy Duty Undercoat at 7m²/kg*
- *Finishing Coat(s): Two coats of Armourglaze Top Coat finish at 8.5m²/kg*

* **Note:** See technical information for correct choice of Substrate Primer.

Product	Coverage Rates	Drying Times
Multi Surface Primer**	6m²/kg	2 hrs
Heavy Duty Undercoat	7m²/kg	4 hrs
Armourglaze Top Coat	8.5m²/kg	4 hrs

Note: Coverage Rates and Drying Times are per coat based on coating to grey faced plasterboard

** Different **Substrate Primer Options** will have varying **Coverage** and **Drying Times** depending on temperature and humidity, please see technical data on **Substrate Primers** for further details (page 9)