

C/S Armourlac™ Performance Coating



Top - Housing Estate Stairwell subject to severe graffiti abuse
Bottom - Subsequent refurbishment using Armourlac

TYPICAL USAGE

Designed for use in aggressive environmental conditions where a coating is required to protect the natural aesthetics of the building materials used; or to provide an anti-graffiti coating to previously decorated surfaces such as:

- industrial, commercial and residential buildings
- schools
- shopping centres
- subways
- train and underground stations
- car parks
- monuments and historic buildings

PRODUCT DESCRIPTION

C/S Armourlac™ is a highly durable, impact and abrasion resistant, zero VOC, clear product that is designed to offer protection to vulnerable surfaces from chemical and environmental attack.

Its high cross linked density produces a very resilient and non-porous coating that provides a highly resistant, non-sacrificial, anti-graffiti surface.

FINISHES

Available in **Eggshell** and **Gloss** finishes.

PIGMENTATION

Clear

PERFORMANCE

C/S Armourlac™ is highly resistant to alkalis, impact, abrasion, water and inhibits a range of fungi found within the building environment.

CLEANING


C/S Armourlac™ will withstand repeated cleaning with solvents and detergents throughout its life.

MODEL SPECIFICATION CLAUSES M60 PAINTING/CLEAR FINISHING

111A PERFORMANCE COATING

- *Manufacturer and reference: C/S Wallglaze Armourlac performance coating system by Construction Specialties (UK) Ltd, Tel: +44 (0) 1296 611000 Fax: +44 (0) 1296 399444*
- *Surface(s):*
- *Preparation: Dry, clean and free from grease dirt and laitance*
- *Initial Coat(s): One coat of Clear Substrate Primer**
- *Intermediate Coat(s):*
- *Finishing Coat(s): Two coats of Armourlac Top Coat finish at 12m²/kg*

* **Note:** See technical information for correct choice of Substrate Primer.

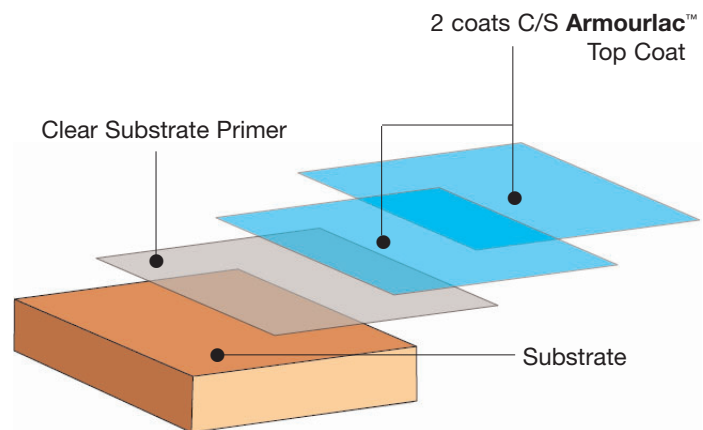

Product	Coverage Rates	Drying Times
Multi Surface Primer**	8m²/kg	1-2 hrs
Armourlac Top Coat	12m²/kg	4 hrs

» | Please specify **clear** version of **Multi Surface Primer** for use with this product

Note: Coverage Rates and Drying Times are per coat based on coating to **grey faced plasterboard**

** Different **Substrate Primer Options** will have varying **Coverage** and **Drying Times** depending on temperature and humidity, please see technical data on **Substrate Primers** for further details (**page 9**)